



CHANGING YOUR FRONIUS WIFI PASSWORD.


Preliminary steps:

You will need a wifi enabled smartphone or tablet.

Changing the Wi-Fi process

1. Next go to your inverter and activate the wifi hotspot as follows.

Navigating in the SETUP menu item




Menu level, 'SETUP' selected

- 1 In the menu level, use the 'Left' or 'Right' keys to select the 'SETUP' menu item
- 2 Press the 'Enter' key




'Standby' entry

The first entry under the SETUP menu item is displayed: 'Standby'



Example: 'WiFi Access Point' menu item

- 3 Use the 'Up' and 'Down' keys to move between the available entries

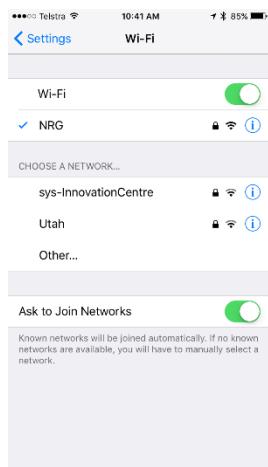

Now use your smartphone or tablets network settings to find the Fronius in your list and connect to it.

The password will be displayed on your inverter – usually 12345678

2. Now you should be logged into the Fronius via your smart phone and can change your network settings. You need to enter:

Entry in browser:

<http://datamanager>

or


192.168.250.181 (IP address for WLAN connection)

Into your phone or tablet


3. You will then be take to a web page

Select Settings

If the internet connection has been changed the network settings can be adapted on the 'Settings' page. Therefore go to **NETWORK** as show in the picture below.

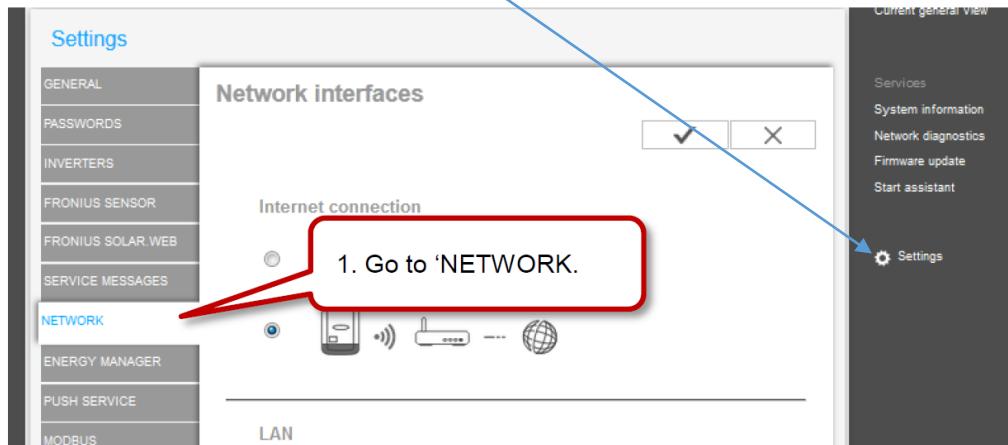

/ Then select the new WiFi network and enter the password under 'Set...'.

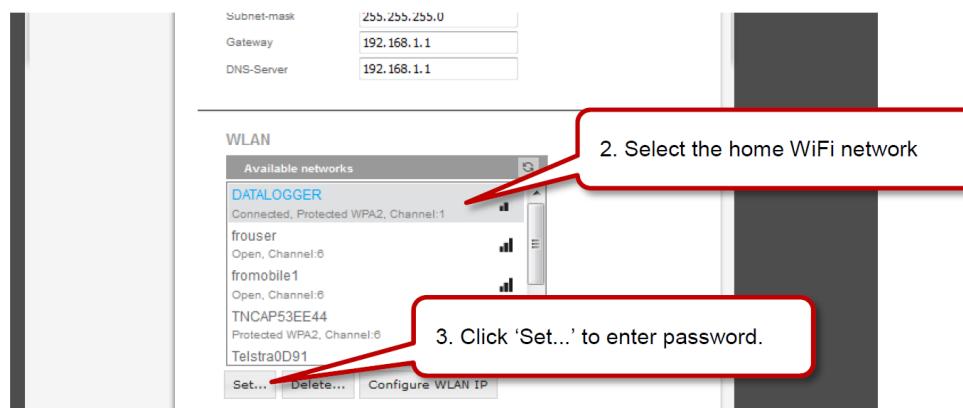

IMPORTANT NOTE


If you have changed a password on an existing router or have any other troubles with an existing setting you will need to delete your network from the Fronius and start again.

- a. Select your network
- b. Click on "Delete" at the bottom
- c. Refresh all Networks

**Carefully enter your network wifi password as the Fronius Inverter will not be able to tell you if it is incorrect.

***If you think you may have inputted it incorrectly you will need to delete the network and start again.

/ Enter the home WiFi network's password into the pop up window.

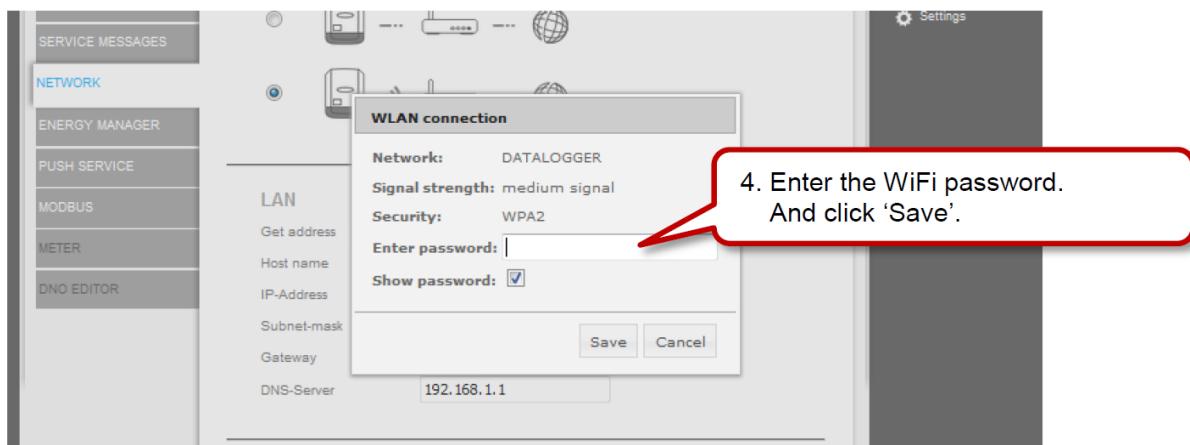


/ Save the settings.



Once you have ticked the box above you inverter will disconnect as a hot spot and return to its normal state.

You should now see this screen:

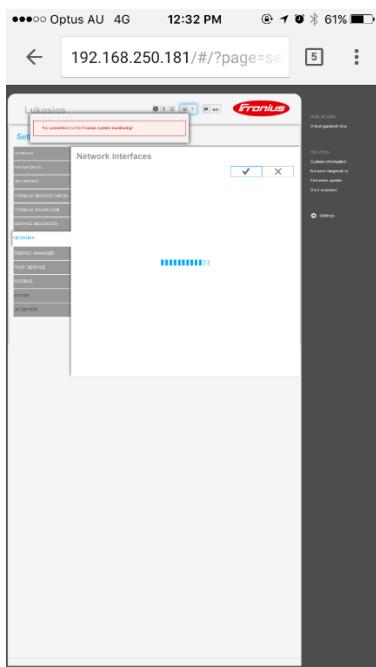

4. Restart the inverter at this point and connect your phone to your home network.
5. Log onto SolarWeb and your inverter should now be online.
6. If you need further support contact Fronius on **03 8340 2900 – Tech Support**